

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 14 TOWNSHIP 15 RANGE 4

DATE: 4-8-05

PARTY CHIEF: Wilcoxen

CREW: _____

TYPE OF MARKER: Survey mark nail over Harrison



METHOD OF ESTABLISHMENT: County: 6-5-04

IN. S.P.C. E ZONE NAD '83

NAME: 15041404

N: 499420.7160(m)

E: 65961.5400(m)

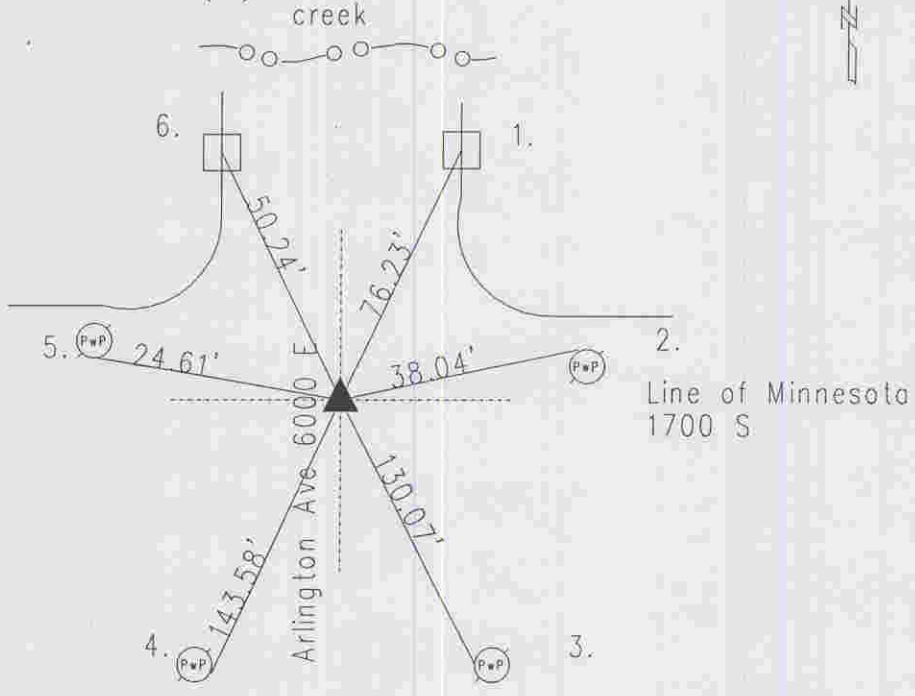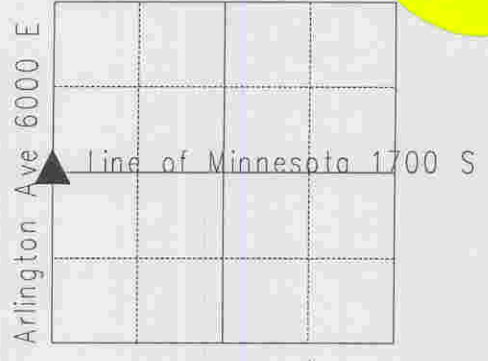

Original post set 1820 by John Hendricks with witness: 15" beech N 81 W 32 links; 6" ironwood S 84 E 35 links per Marion County Atlas pg. 10. Survey by D.B. Hosbrook 2-28-1860 called a rock set with no witness per Warren Township Legal Survey Book pg. 21. Burres 10-15-48 called a cut cross in concrete. Monroe 5-16-61 called a cut cross in pavement. 8-11-71 McLand called PK nail. Wilcoxen 9-17-75 called a railroad spike. 6-24-92 called a railroad spike with cut cross 2" down. Wilcoxen excavated 7-13-92 and set Harrison. Re-tied 9-10-99 by Wilcoxen. Re-tied 6-5-04 by Wilcoxen. Re-tied 4-8-05 by Wilcoxen. 15041404

REF.	DISTANCE	DESCRIPTION
1.	76.23'	Mag nail w/bw top of wooden post of guard rail
2.	38.04'	Road nail NW PwP#1725
3.	130.07'	Road nail w/washer W PwP#520-616 12"up
4.	143.58'	Road nail w/washer F PwP#148-615 A 12"up
5.	24.61'	PK nail S PwP#149-615 A 12"up
6.	50.24'	Mag nail w/bw top of wooden post on guard rail